





adore[®]

REGENT


SOLID RIGID CORE

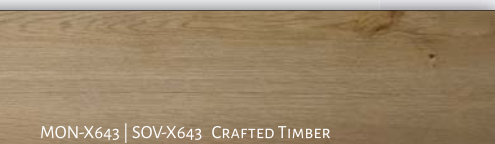


MON-X643 | SOV-X643 CRAFTED TIMBER

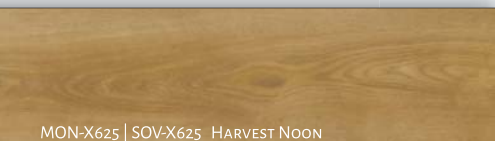


MON-X625 | SOV-X625 HARVEST NOON

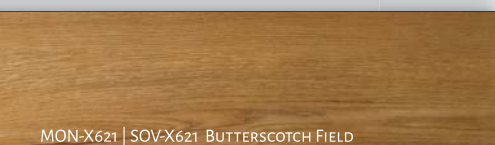

MON-X621 | SOV-X621 BUTTERSCOTCH FIELD

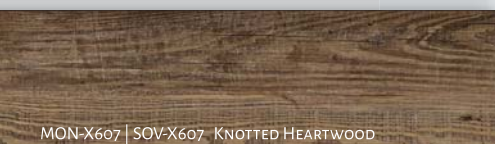


MON-X607 | SOV-X607 KNOTTED HEARTWOOD

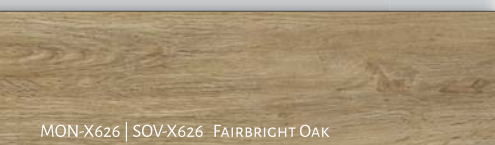


MON-X626 | SOV-X626 FAIRBRIGHT OAK



RUFFLED DOVE MON-X631 | SOV-X631

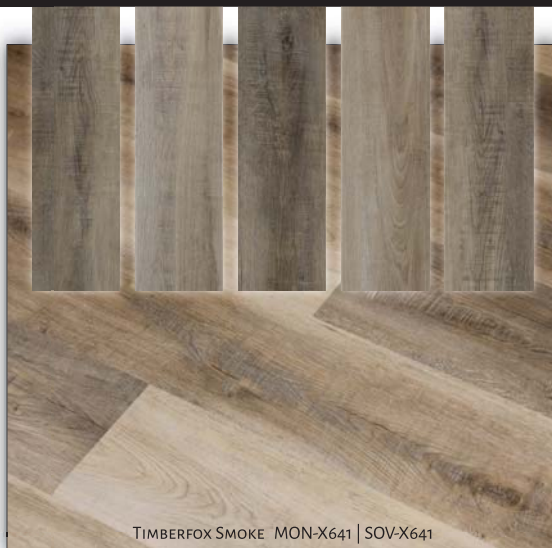

TIMBERFOX SMOKE MON-X641 | SOV-X641

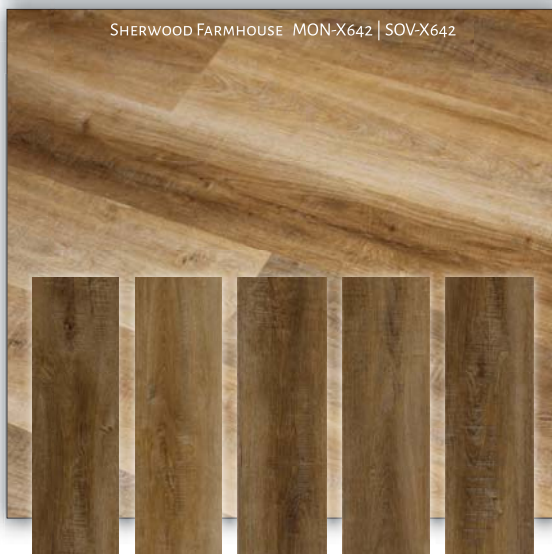


SHERWOOD FARMHOUSE MON-X642 | SOV-X642




MON-X618 | SOV-X618 WOODLAND DUSK



MON-X612 | SOV-X612 SANDAL BAY

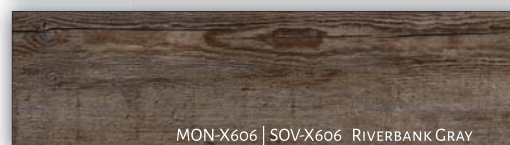


MON-X606 | SOV-X606 RIVERBANK GRAY

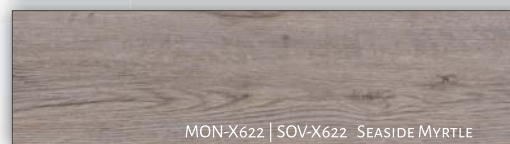

MON-X622 | SOV-X622 SEASIDE MYRTLE



MON-X628 | SOV-X628 SUMMER STORM

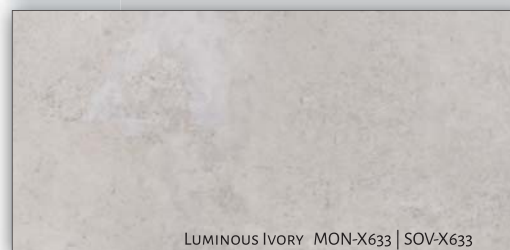

LUMINOUS IVORY MON-X633 | SOV-X633

SOVEREIGN

commercial grade click down flooring

7.0" x 48.0" nominal plank dimensions
12.0" x 24.0" nominal tile dimensions
6.0 mm total thickness
4.0 mm core gauge
22 mil (0.55mm) wear layer
Luxurious 1.5 mm attached IXPE pad
Industry-leading click down installation
Duramond™ surface enhancement
Orthophthalate-free construction
100% recyclable after use

Planks - 10 planks / 23.75 ft² (nom.)
Tiles - 12 tiles / 24.00 ft² (nom.)

15 Year Commercial Warranty
Lifetime Residential Warranty

SPECIFICATION TESTING FOR RIGID SOLID CORE

	Standard	Sovereign Result	Monarch X Result
Total Thickness	ASTM F-386	6.0mm	4.8mm w/pad
Wear Layer Thickness	ASTM F-410	0.55 mm/22 mil	0.3mm/12 mil
Critical Radiant Flux	ASTM E-648	Class I	Class 1
Chemical Resistance	ASTM F-925	No change 24 hours	No change 24 hours
Static Load Limit	ASTM F-970	1,500 psi	1,500 psi
Heat Stability	ASTM F-1514	<8.0 Delta E	<8.0 Delta E
Light Stability	ASTM F-1515	<8.0 Delta E	<8.0 Delta E
Residual Indentation	ASTM F-1914	<0.002 Inch	<0.002 inch
Size Change	ISO 23999	Pass	Pass
Size and Squareness	ASTM F-2421	<0.25%	<0.25%
Static Coefficient of Friction	ASTM D 2047	Meets or exceeds 0.6	Meets or exceeds 0.6
Cupping/Curling	ISO 23999	≤0.10mm	<0.05mm
Impact Sound Transmission (IIC)	ASTM E-492	IIC 63	IIC 63
Airborne Sound Transmission (STC)	ASTM E-90	STC 53	STC 53
Impact Sound Reduction (ΔIIC)	ASTM E-2179	ΔIIC 24	ΔIIC 24

MONARCH^X

residential and light commercial

5.9" x 48.0" nominal plank dimensions
12.0" x 24.0" nominal tile dimensions
4.8 mm total thickness
3.5 mm core gauge
12 mil (0.3mm) wear layer
Class-leading 1.0 mm attached IXPE pad
Industry-leading click down installation
Duramond™ surface enhancement
Orthophthalate-free construction
100% recyclable after use

Planks - 16 planks / 31.51 ft² (nom.)
Tiles - 16 tiles / 32.00 ft² (nom.)

10 Year Light Commercial Warranty
Lifetime Residential Warranty

